


ELECTROMECHANICAL ARM BARRIER

Arm Barrier – BRL 60

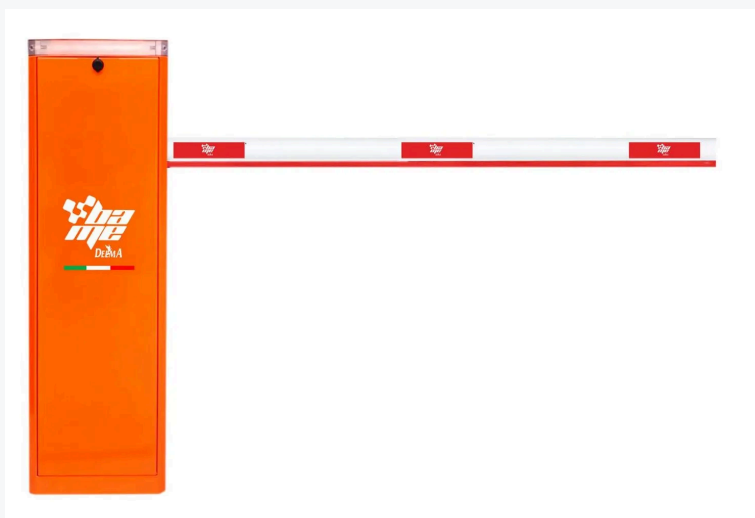

PRODUCT OVERVIEW

An electromechanical 24VDC arm barrier designed for intensive use and vehicle traffic control across passages from 2.5 to 6 meters. Fitted with an anodized round aluminum boom, adjustable in length.

TECHNICAL SPECIFICATIONS

Power Supply	230V – 50/60Hz
Motor Voltage	24VDC
Maximum Current	3.75A
Opening Time	8 sec
Duty Cycle	Intensive use
Protection Rating	IP55
Encoder	No
Operating Temperature	-20°C to +55°C
Lubrication	Permanent grease
Passage Width	Up to 6.0 m
Weight	51 kg
Units per Pallet	9
Control Unit	SIRIO 4/24V