


ELECTROMECHANICAL ARM BARRIER

Arm Barrier – LUX 40

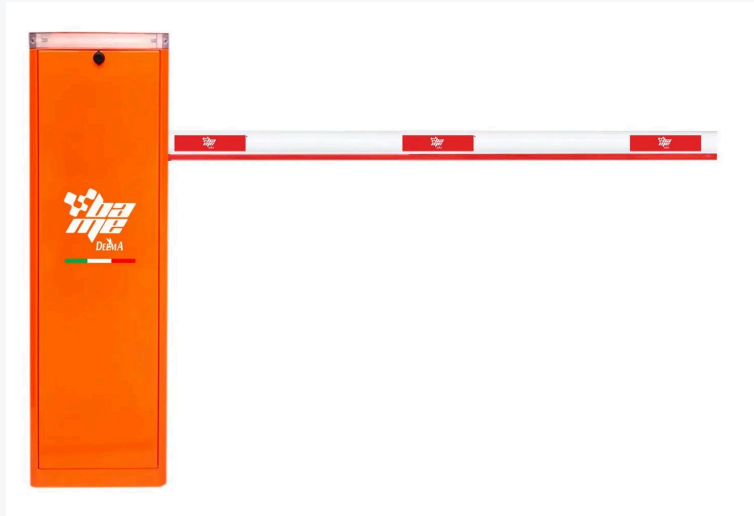

PRODUCT OVERVIEW

An electromechanical 24VDC arm barrier for continuous operation, suited to passages up to 4 meters with a 3-second opening time.

TECHNICAL SPECIFICATIONS

Power Supply	230V – 50/60Hz
Motor Voltage	24VDC
Maximum Current	3.75A
Opening Time	3 sec
Duty Cycle	Intensive use
Protection Rating	IP55
Encoder	No
Operating Temperature	-20°C to +55°C
Lubrication	Permanent grease
Passage Width	Up to 4.0 m
Weight	50 kg
Units per Pallet	9
Control Unit	SIRIO 4/24V