


ELECTROMECHANICAL ARM BARRIER

Arm Barrier – LUX 60

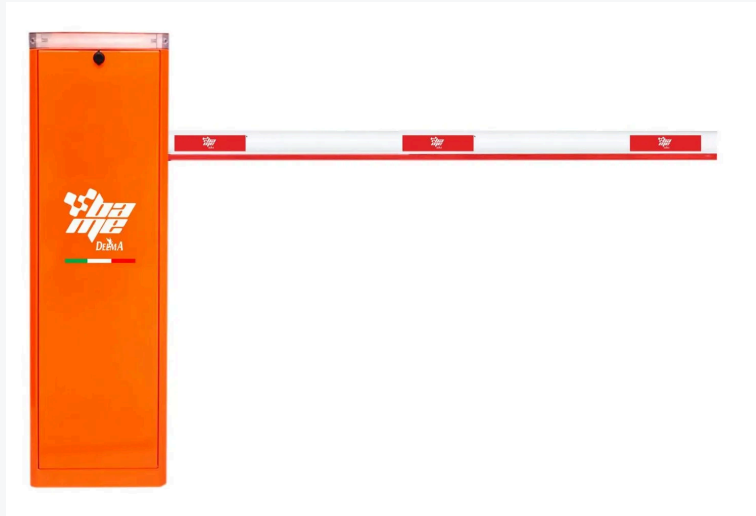

PRODUCT OVERVIEW

An electromechanical 24VDC arm barrier for continuous operation, fitted with an encoder and an opening time under 2.3 seconds.

TECHNICAL SPECIFICATIONS

Power Supply	230V – 50/60Hz
Motor Voltage	24VDC
Maximum Current	3.75A
Opening Time	Less than 2.3 sec
Duty Cycle	Intensive use
Protection Rating	IP55
Encoder	Yes
Operating Temperature	-20°C to +55°C
Lubrication	Permanent grease
Passage Width	3.0 m
Weight	49 kg
Units per Pallet	9
Control Unit	SIRIO 4/24V