


ELECTROMECHANICAL ROAD BARRIER

Arm Barrier – LUX FAST 30

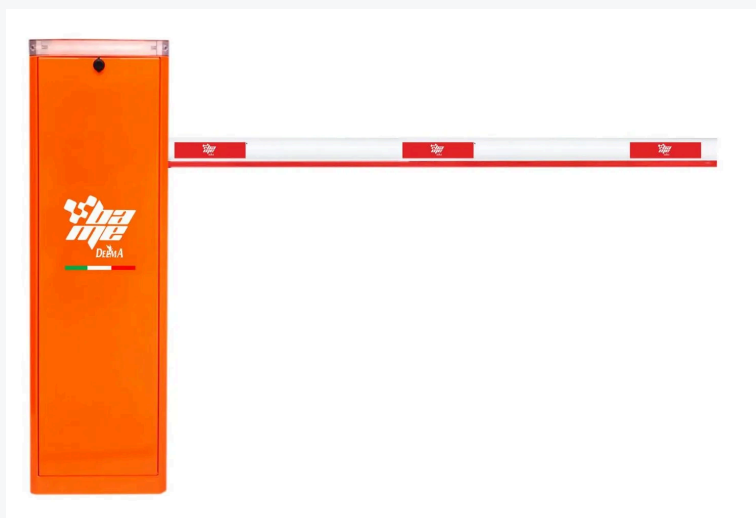

PRODUCT OVERVIEW

Electromechanical road barrier suitable for intensive use. The flashing light is integrated into the structure to ensure visibility during maneuvers, with the option to integrate a traffic-light flasher into the LED compartment. High-quality electronics and precise sensitivity control ensure reliable, long-lasting, and completely safe operation. The LUX FAST version, ideal for installations in parking areas, ensures fast openings in less than 2.3 seconds.

TECHNICAL SPECIFICATIONS

Mains Power Supply	230V – 50/60Hz
Motor Power Supply	24VDC
Maximum Absorbed Current	3.75A
Opening Time	< 2.3 sec
Duty Cycle	Intensive
Protection Rating	IP55
Encoder	Yes
Operating Temperature	-20°C to +55°C
Lubrication	Permanent grease
Passage Width	3.0 m
Weight	49 kg
Units per Pallet	9
Control Unit	SIRIO 4/24V